



TDM866-(605-630)G

MODULE SIZE

2382*1134*30mm

POWER OUTPUT RANGE

605W-630W

POSITIVE POWER TOLERANCE

0 - + 3%

N-TOPCON MONOCRYSTALLINE MODULE

132 CELL

MAXIMUM EFFICIENCY



23.32%

LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty

30 Year Linear Power Warranty

≤1% 1st Year Degradation **≤0.4%** Annual Degradation

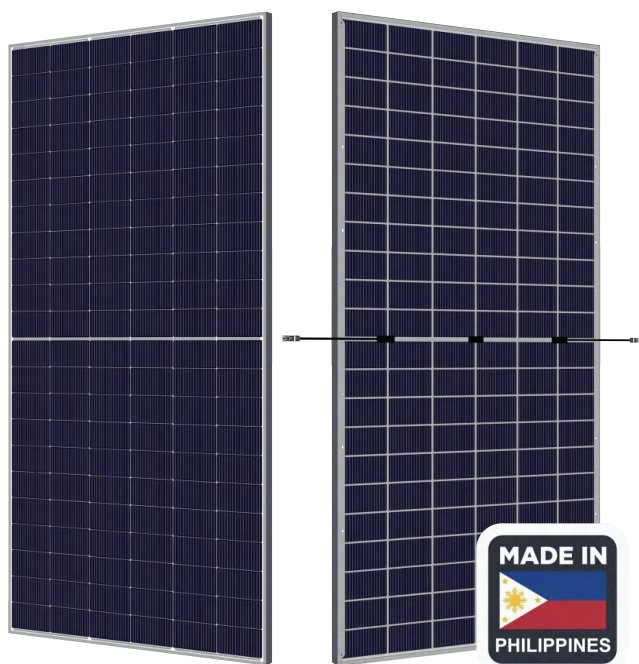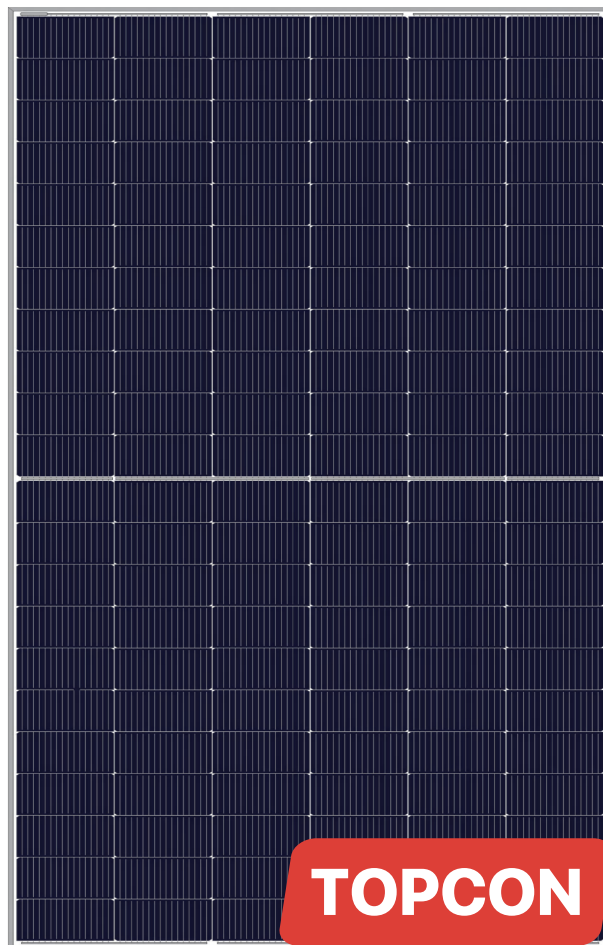

Competitive Low Light Performance



Reduced Power Loss by Minimising the Effect of Shadow Shading



High Density Encapsulation



Multi-Busbar Technology



2400pa Wind Load
5400pa Snow Load



Reduced BOS & Increased ROI


**TIDE
SOLAR**

Add: Lima Technology Center, Malvar, Batangas, Philippines

Website: www.tide-solar.com

E-mail: info@tide-solar.com

DIMENSIONS OF PV MODULE

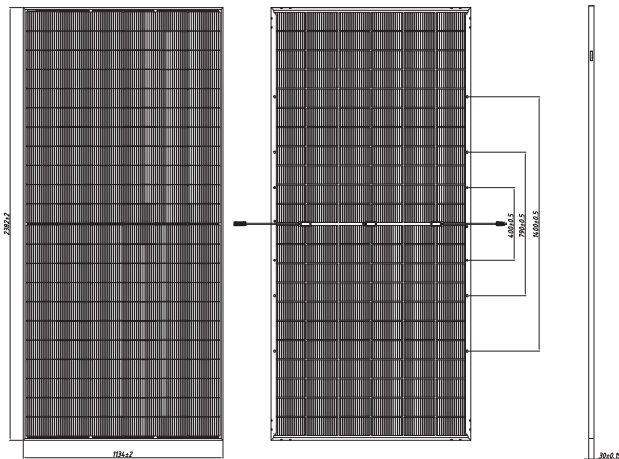

STRUCTURAL CHARACTERISTICS

Module Size	2382x1134x30mm
Weight	32.4Kg
Cell	N-topcon 182.3x105mm(132pieces)
Glass	2.0mm / 2.0mm semi-tempered glass
Frame	anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Lead	4.0mm ² 300mm(+)/ 300mm(-) or customized
Mechanical Load	front 5400pa / back 2400pa*

*Refer to Tidesolar installation manual for details

ELECTRICAL CHARACTERISTICS

Component Model	TDM866-605G		TDM866-610G		TDM866-615G		TDM866-620G		TDM866-625G		TDM866-630G	
Maximum Power (Pmax)	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
	605	670	610	676	615	682	620	687	625	693	630	698
Open Circuit Voltage (Voc)	48.48	48.48	48.68	48.68	48.88	48.88	49.08	49.08	49.28	49.28	49.48	49.48
Short Circuit Current (Isc)	15.90	17.62	15.96	17.68	16.02	17.75	16.08	17.82	16.14	17.88	16.20	17.95
Maximum Power Voltage (Vmp)	40.31	40.31	40.46	40.46	40.60	40.60	40.74	40.74	40.88	40.88	41.02	41.02
Maximum Power Current (Imp)	15.01	16.63	15.08	16.71	15.15	16.79	15.22	16.86	15.29	16.94	15.36	17.02
Component Efficiency (η)	22.40		22.58		22.77		22.95		23.14		23.32	
Power Tolerance	(0, +3%)											
Maximum System Voltage	1500V DC											
Maximum Rated Fuse Current	35A											

STC: Irradiance 1000 W/m² module temperature 25 °C AM=1.5 BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5


TEMPERATURE CHARACTERISTICS

Maximum Power Temperature Coefficient	-0.29 % / °C
Temperature Coefficient Of Open Circuit Voltage	-0.24 % / °C
Temperature Coefficient Of Short Circuit Current	+0.04 % / °C
Working Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
Bifacial-Factor	80% ± 5%


PACKING METHOD

Module Size	2382x1134x30mm
Container	40' HQ
Quantity Per Pallet	36
Number Of Pallets Per Container	20/16(US)
Quantity Per Container	720/576(US)

I-V/P-V CURVE AT DIFFERENT IRRADANCE(620W)

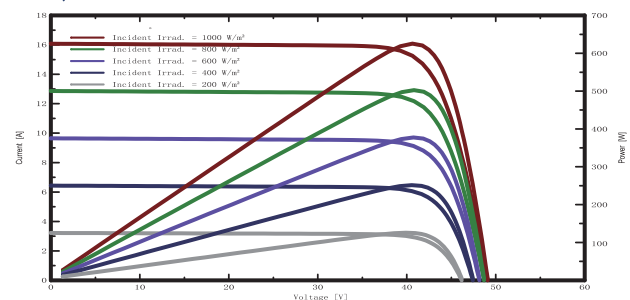

I-V CURVE AT DIFFERENT WORKING TEMPERATURE(620W)

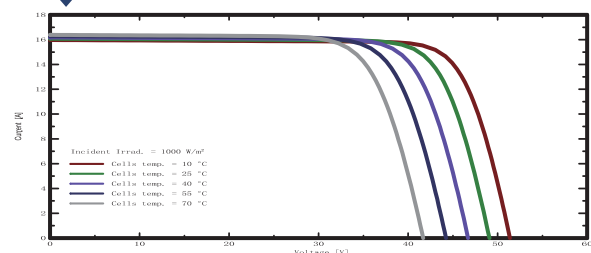

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Tidesolar Philippines Corporation reserves the right to make any adjustment to the information described herein at any time without notice.